## Centerm

Thin Client

**F640** 









#### PROFILE

Powered by Intel CPU, Centerm F640 is designed to support CPU-intensive and graphic demanding applications delivering smooth and outstanding performance in the standalone and virtual desktop environment.

#### **C**ERTIFIED BY





Build No. 20220107

#### **F**EATURES

#### 1 Triple display and 4K resolution rate

2 DP and one type-c could lead the unit to support extend triple display. Both of them can carry out 4k resolution rate with 60 Hz

## 02 M.2 expansion

Support M.2 interface attached for a faster I/O, regardless storage or Wi-Fi


### 03 Multiple VDI protocol supported

Citrix ICA/HDX, VMware PCoIP and Microsoft RDP are supported for different purpose of different virtualization

#### **04** Trusted Platform Module

Give businesses a layer of protection for data from penetration.

#### CONNECTIVITY

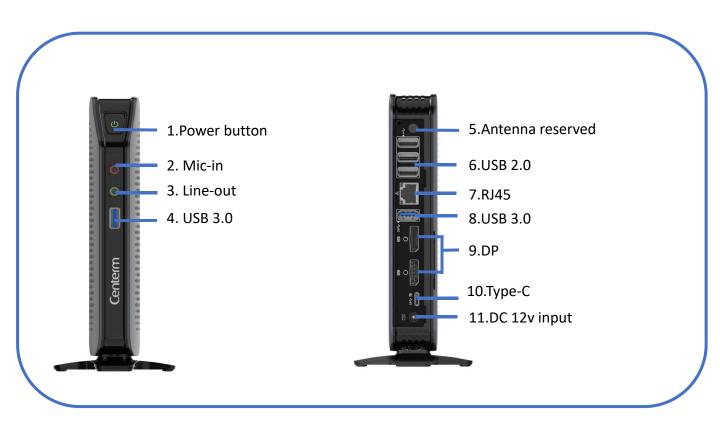

## **S**PECIFICATION

Processor	Intel quad core 2.0Ghz
Available Operating System	WIN 10 IOT
Protocols	Citrix receiver/Vmware View Client/RDP client
Management	CDMS <sup>1</sup>
RAM (DDR4)	4GB
Storage (mSATA)	64GB
Display	DP x 2,Type-C x 1
Resolution	DP:4096 x 2160 @60Hz, Type-C :4096 x 2160 @60Hz
Color Depth	32 bits
LAN	x 1 (10/100/1000Mbps, RJ-45)
USB 2.0	x 3
USB 3.0	x 2
Audio	Line-out x 1 , Mic-in x 1
Dimension	131mm x 31.5mm x 167mm (stand excluded)/ 131mm ×76mm ×178mm (stand included)
Net Weight	0.532 kg
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC
Power Consumption	< 10w
Mounting	Vertical standing feet
Security	Standard Kensington anti-theft keyhole
Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

# **O**ptional items

RAM (DDR4)	Available at 16GB
m.2	x 1 (SATA or PCIE): x 1 (Wi-Fi)
TPM Module	Optional
Mountings	VESA mounting bracket

1. CDMS: Cinfin desktop management system

Learn more visit en.centerm.com







